



**Millennium Power Manufacturing Corp.**  
*<http://www.mpmc-china.com>*

## **MCS900-1(KTA38-G2A)**

### **Generating set Technical Data Sheet**



NO:CDT200906026-01

© 2009 Millennium Power Manufacturing Corp.



**ISO9001:2000**  
MPMC GENERATING SETS



## STANDARD SPECIFICATION

### General features:

- Composed of Cummins diesel engine and Stamford or MPMC alternator
- 24V DC start motor and storage battery
- Brushless, Self-excited, IP23, insulation class H alternator
- 40°C radiator as standard, 50°C is optional
- Key start panel control system as standard, digital auto-start panel is optional
- Optional open type or silent type
- All generator sets are gone through rigorous testing before being released to the market place, including 50% load, 75% load, 100% load , 110% load and all protection function (overspeed stop, high water temperature, low oil pressure, battery charging fail, emergency stop)



### Genset Main Technical Data

**3-PH, 50Hz@1500RPM, 400/230V** (Also Can Be Made According To Customers' Special Requirements)

Genset Model	Genset Specification					Engine Specification				Alternator Model
	kVA		Cons. 100% (L/H)	dB(A) @7m	Tank (L)	Model	Cyl.	Gov.	Asp.	
	ESP	PRP								
MCS900-1	1000	900	188	N/A	N/A	KTA38-G2A	12	E	TW	LVI 634D
MCS900S-1	1000	900	188	75	N/A	KTA38-G2A	12	E	TW	LVI 634D
MCM900-1	1000	900	188	N/A	N/A	KTA38-G2A	12	E	TW	MPA 404D
MCM900S-1	1000	900	188	75	N/A	KTA38-G2A	12	E	TW	MPA 404D

- 1) Available in various voltages
- 2) To show MPMC Generating Sets Model  
For example: MCM38-1A, it is the open generation set.  
MCM38S-1A, it is the silent generating set.
- 3) ESP=Standby power standby duty, operation under variable load, without overload  
PRP=Prime power continuous duty operation, under variable load, 10% overload permissible 1/12hr
- 4) E=Electronic speed governor;  
M=Mechanical speed governor
- 5) Asp=Aspiration;  
NA=Naturally Asp;  
TC=Turbocharged;  
TW=Turbocharged after water-cooled;  
TCA= Turbocharged air-air after cooled
- 6) Technical data is subject to work test conditions

## Reliable Performance

### Voltage regulation

Voltage regulation maintained within  $\pm 0.5\%$  as follow:

- Power factor Between 0.8~1.0 lag
- From no load to full load, any steady load
- Speed droop variation under 4.5%

### Frequency/Speed undulation

- Change load from 0-100%, Frequency/Speed Droop Ratio within 5%.
- Load from 25-100%, any steady load Frequency/Speed undulation within 0.25%


### Effect factor of telecom

- TIF( MA MG1-22) better than 50
- THF( BS EN60034) better than 2%

## Criterion

- ISO8528, GB/T2820
- EN12601:2001, EN60034-22:1997, EN60204-1:2006
- ISO9001:2000 Quality Control System

## Dimension and Weight

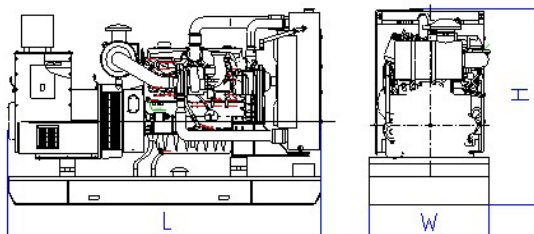


### Open Type

Overall size (L\*W\*H)

4550×2060×2450

**Weight: 7600kg**

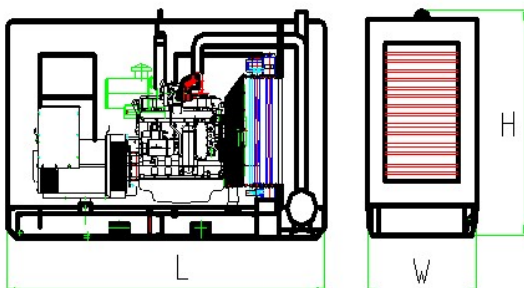

### Silent Type

Overall size (L\*W\*H)

6060×2438×2895

**Weight: 9000kg**

## ENGINE SPECIFICATION

### Cummins Diesel Engine

#### Technical Data

Engine Model	KTA38-G2A
Number of Cylinders	12
Cylinder arrangement	60° Vee
Cycle	4 Cycle
Aspiration	Turbocharged after water-cooled
Bore×Stroke (mm×mm)	159 x 159
Displacement (Liter)	37.8
Compression Ratio	14.5:1
Prime Power/Speed (kW/rpm)	813/1500
Standby Power/Speed (kW/rpm)	895/1500
Speed Governor	electrical
Cooling System	Water-cooled , 40℃ Radiator As Standard, 50℃ Is Optional.
Speed Stability (%)	≤5%
Total lubrication system capacity (L)	135
Coolant capacity (Inc. radiator) (L)	194
Fuel Consumption at 100% Load (g/kWh)	199.7 (at 1500RPM)
Starter Motor	DC24V,
Alternator	AC24V

## Alternator SPECIFICATION

### Stamford Alternator (Standard)

### MPMC Alternator (Option)

#### Technical Data

Alternator Model	LVI XXXX (Stamford) MPA XXXX(MPMC) Please Refer To The “ Genset Main Technical Data”
Exciter type	Brushless, Self-excited
Power factor	0.8
Voltage Adjust range	≥5%
Voltage Regulation NL-FL	≤±0.5%
Insulation Grade	H
Protection Grade	IP23

## Control System

### 1. Standard: MP170HC Key Start

Providing the standard functions as follows:

(Also can be made according to the customers' special requirements)

- \* Start/Stop controller
- \* Ampere meter
- \* Voltmeter and selector switch
- \* Frequency meter/ Water temperature gauge/ Oil pressure gauge/  
Hour counter/ Battery voltage meter
- \* Emergency stop pushbutton
- \* Alarm System: Over speed、High Engine Temperature  
Low Oil Pressure、Charge Fail
- \* Protection System: Over speed、High Engine Temperature、Low Oil  
Pressure、Emergency Stop. And the other protection function  
pre-setting

### 2. Option: Smartgen HGM6110 Digital Auto Start

### 3. Option: Smartgen HGM6120 Digital Auto Start

(Option assembled with the ATS)

### 4. Option: Deep Sea DSE5210 Digital Auto Start

### 5. Option: Deep Sea DSE5220 Digital Auto Start

(Option assembled with the ATS)

Digital Auto-start Generator controller integrating digital, intelligent and network techniques is used for automatic control system of diesel generator. It can carry out functions including automatic start/stop, data measure and alarming. Optionally assembled with the ATS, it can carry out auto-switching between the outer power and generating set power. (AMF)

#### Functions:

- \* Automatic Start/Stop
- \* 3 start attempts failure and Automatic Crank Disconnect
- \* Parameters display (V/A/Hz/Hour)
- \* Engine monitoring and protection
- \* Charge alternator exciting and Charge alternator fail alarm
- \* Running hour counting
- \* Settings can be adjustable via key buttons on front panel

### 6. option: BGC-L

(Main used in Multiple gen-sets, load sharing)



(1)



(2)



(3)



(4)



(5)



(6)